



# Infrared Multi Touch Screen

Size: 32 43 50 55 65 75 86 Inch

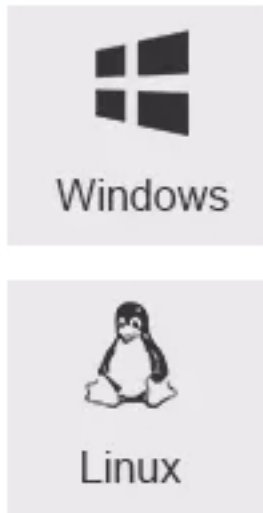

Winmax®

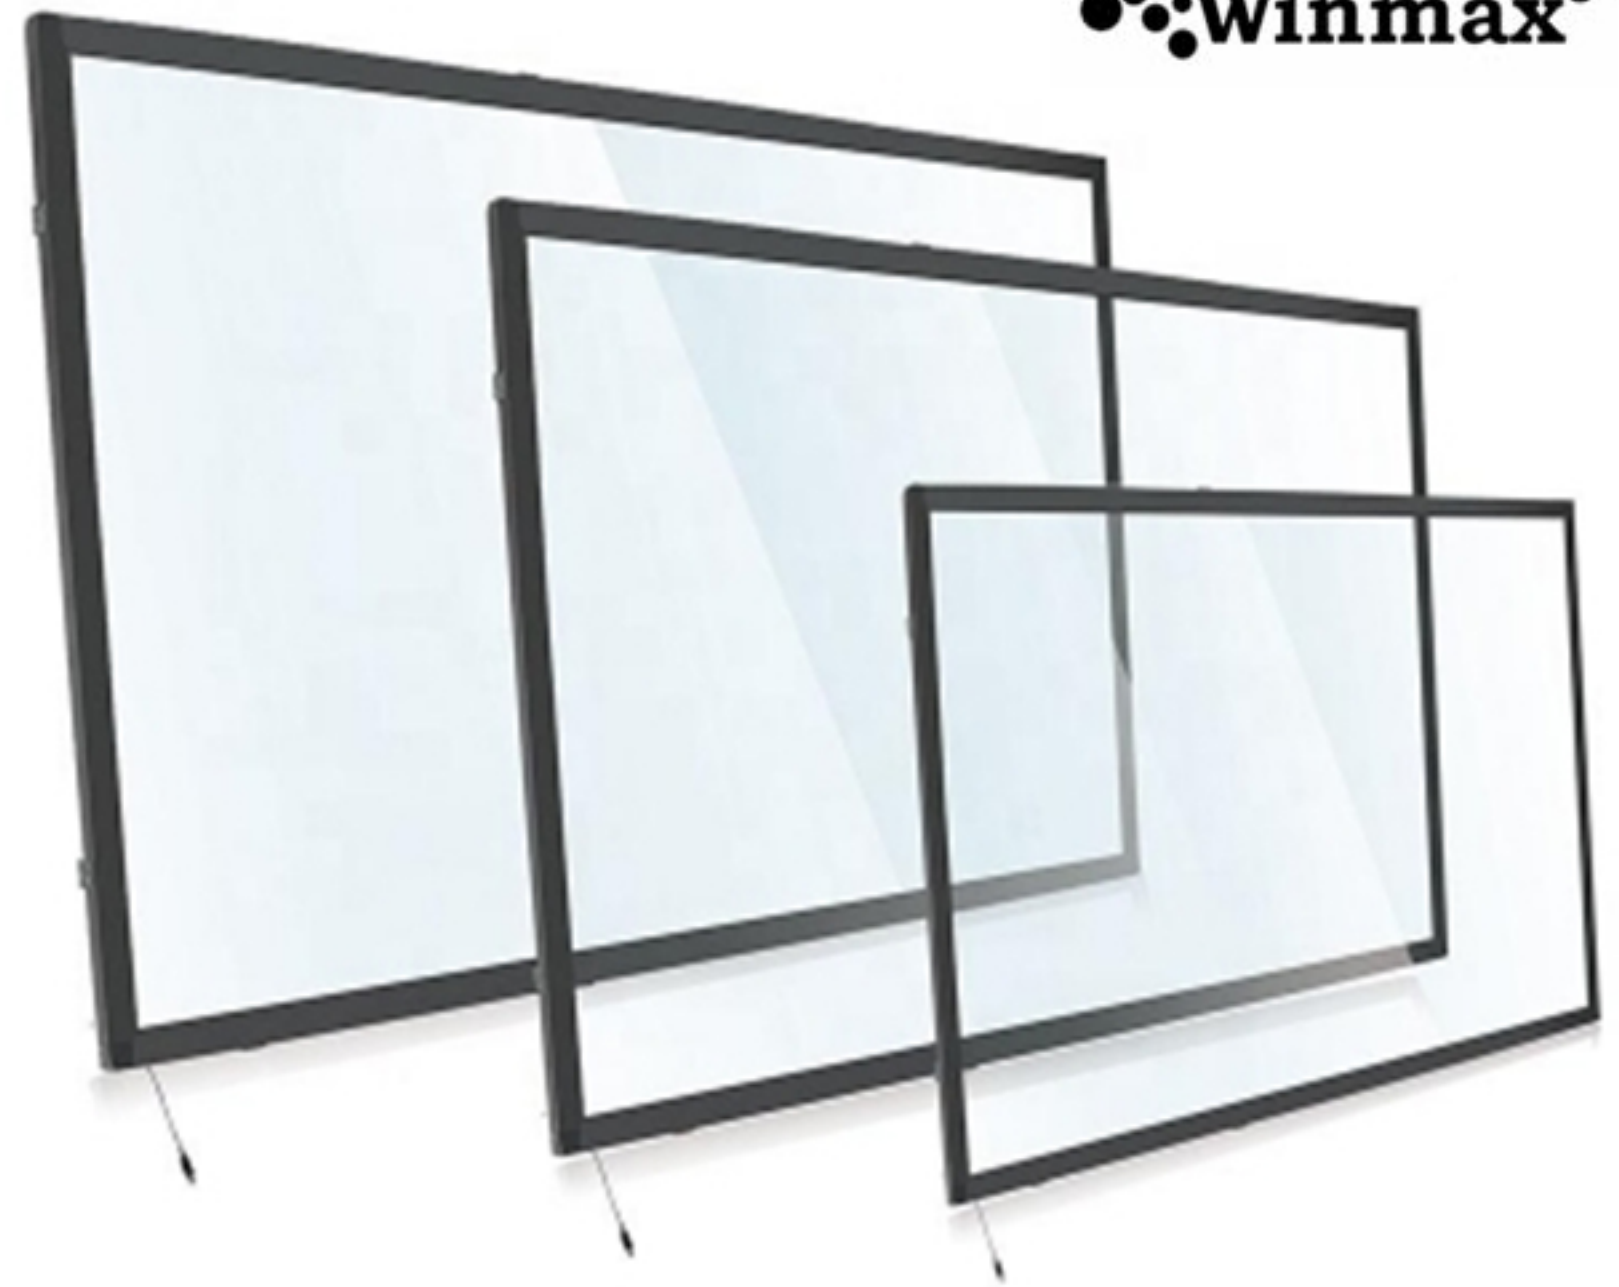

- ✓ Plug and Play
- ✓ Drive-free
- ✓ Safety Ground Wire

Multi touch smooth



10 Touch



## Specification:

### The parameter of the Infrared Touch Screen Frame.

|                           |                                                                                                  |
|---------------------------|--------------------------------------------------------------------------------------------------|
| Hardware Special Features | Gesture recognition                                                                              |
| Technology                | Infrared                                                                                         |
| Touch Point               | 10-20 touch                                                                                      |
| Cursor Speed              | 220 dot/s                                                                                        |
| Display ratio             | 16:10                                                                                            |
| Resolution                | 32768 x 32768                                                                                    |
| Positioning Accuracy      | <2mm                                                                                             |
| Connecting Port           | USB 2.0 USB 1.1 USB 3.0                                                                          |
| View Angle                | Horizontal 170°, vertical 160°                                                                   |
| Operating System          | Windows 2000, Windows XP, Windows Vista, Windows 7, Windows 8.1, Windows 10, Linux, Mac, Android |
| Power Supply              | USB power supply DC 4.6V- 5.0V <1W ( 100mA at 5V)                                                |
| Working Condition         | Indoor or Outdoor                                                                                |
| Storage                   | Temperature: -30°C~60°C Humidity: 0%~95%                                                         |
| Operation                 | Temperature: -10°C~45°C Humidity: 10%~90%                                                        |
| Installation              | Wall mounted, cabinets, mobile stand (optional)                                                  |